


Type:	D1-44 KV	x.	x
	D1-49 KV	x.	x
	D1-54 KV	x.	x
	D1-59 KV	x.	x
	D1-64 KV	x.	x
	D1-69 KV	x.	x
	D1-74 KV	x.	x

rear panel
volume

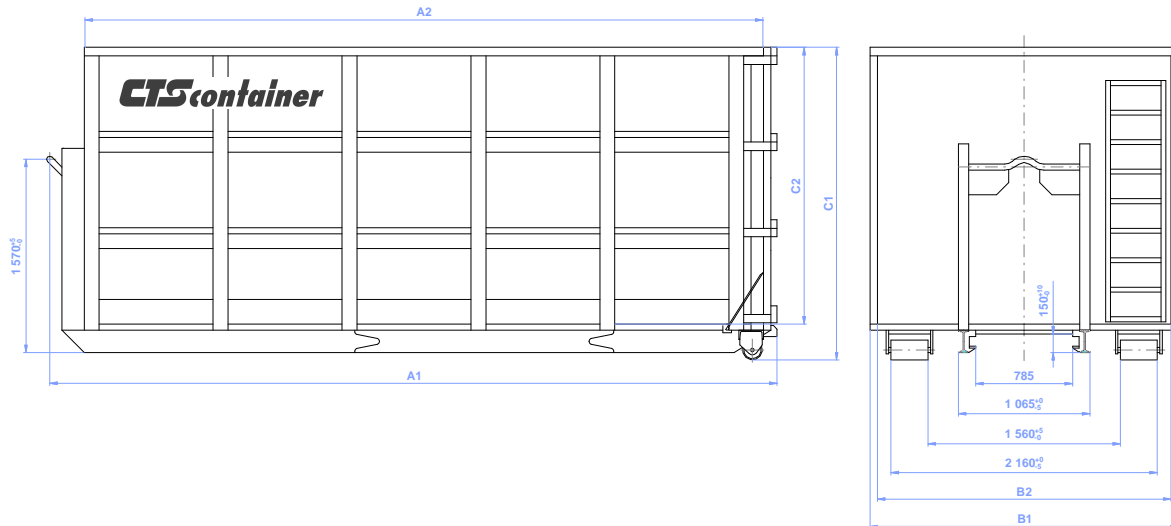

Designed for handling and transport of soil, waste, constructional and loose material on truck or trailer mounted hook lifts.

It is manufactured of square sheet steels of 5 mm thickness (floor) and 3 mm (sides) in various volumes (in type designation the last but one digit or – more precisely – double issue). Container frame is made according to standard DIN 30722 part 1.

Rear panel designation as follows (the last digit in container type):

- **x1** one-piece, flap, opened around the upper horizontal hinges, or
- **x2** double-piece, opened around the vertical hinges to sides, with lock in the open position.

Accessories and adjustments for extra charge: (has to be placed in order)

- rear panel seal of with rubber section against fore shots;
- hinged counters – e.g. for sorted waste collection;
- universal hinge of rear panel (EUROCLIP), enabling tilting up and down and easy removal;
- elevated rear and front panel of the lowest container volumes;
- cover or tarpaulin for container;
- hooks for fastening the net or tarpaulin;
- binding elements, embedded in the container floor;
- floor and sides stiffening;
- the colour design of surface treatment can be adopted to customer's requirement;
- safety lock of container loop;
- other, as per agreement.

Basic technical data	D1-44 KV 7.x	D1-44 KV 9.x	D1-44 KV 12.x	D1-44 KV 14.x	D1-44 KV 16.x	D1-44 KV 19.x	D1-44 KV 21.x
Length A1 (A2)	4 400 (4 000)	4 400 (4 000)	4 400 (4 000)	4 400 (4 000)	4 400 (4 000)	4 400 (4 000)	4 400 (4 000)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	1 050 (800)	1 250 (1 000)	1 500 (1 250)	1 750 (1 500)	2 000 (1 750)	2 250 (2 000)	2 500 (2 250)
Volume	7,49 m ³	9,36 m ³	11,70 m ³	14,04 m ³	16,38 m ³	18,72 m ³	21,06 m ³
Distance locking pin L4	2 640 mm	2 640 mm	2 640 mm	2 640 mm	2 640 mm	2 640 mm	2 640 mm
Weight of container ±5%	1 670 kg	1 710 kg	1 770 kg	1 840 kg	1 920 kg	2 010 kg	2 110 kg
Total weight	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg

Basic technical data	D1-49 KV 8.x	D1-49 KV 11.x	D1-49 KV 13.x	D1-49 KV 16.x	D1-49 KV 18.x	D1-49 KV 21.x	D1-49 KV 24.x
Length A1 (A2)	4 900 (4 500)	4 900 (4 500)	4 900 (4 500)	4 900 (4 500)	4 900 (4 500)	4 900 (4 500)	4 900 (4 500)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	1 050 (800)	1 250 (1 000)	1 500 (1 250)	1 750 (1 500)	2 000 (1 750)	2 250 (2 000)	2 500 (2 250)
Volume	8,42 m ³	10,53 m ³	13,16 m ³	15,80 m ³	18,42 m ³	21,06 m ³	23,69 m ³
Distance locking pin L4	2 890 mm	2 890 mm	2 890 mm	2 890 mm	2 890 mm	2 890 mm	2 890 mm
Weight of container ±5%	1 730 kg	1 790 kg	1 860 kg	1 940 kg	2 030 kg	2 130 kg	2 240 kg
Total weight	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg

Basic technical data	D1-54 KV 9.x	D1-54 KV 12.x	D1-54 KV 15.x	D1-54 KV 18.x	D1-54 KV 20.x	D1-54 KV 24.x	D1-54 KV 26.x
Length A1 (A2)	5 400 (5 000)	5 400 (5 000)	5 400 (5 000)	5 400 (5 000)	5 400 (5 000)	5 400 (5 000)	5 400 (5 000)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	1 050 (800)	1 250 (1 000)	1 500 (1 250)	1 750 (1 500)	2 000 (1 750)	2 250 (2 000)	2 500 (2 250)
Volume	9,36 m ³	11,70 m ³	14,62 m ³	17,55 m ³	20,47 m ³	23,40 m ³	26,32 m ³
Distance locking pin L4	3 140 mm	3 140 mm	3 140 mm	3 140 mm	3 140 mm	3 140 mm	3 140 mm
Weight of container ±5%	1 790 kg	1 890 kg	1 950 kg	2 100 kg	2 200 kg	2 320 kg	2 460 kg
Total weight	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg

Basic technical data	D1-59 KV 10.x	D1-59 KV 13.x	D1-59 KV 16.x	D1-59 KV 19.x	D1-59 KV 23.x	D1-59 KV 26.x	D1-59 KV 29.x
Length A1 (A2)	5 900 (5 500)	5 900 (5 500)	5 900 (5 500)	5 900 (5 500)	5 900 (5 500)	5 900 (5 500)	5 900 (5 500)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	1 050 (800)	1 250 (1 000)	1 500 (1 250)	1 750 (1 500)	2 000 (1 750)	2 250 (2 000)	2 500 (2 250)
Volume	10,30 m ³	12,87 m ³	16,09 m ³	19,30 m ³	22,52 m ³	25,74 m ³	28,96 m ³
Distance locking pin L4	3 390 mm	3 390 mm	3 390 mm	3 390 mm	3 390 mm	3 390 mm	3 390 mm
Weight of container ±5%	1 850 kg	1 970 kg	2 090 kg	2 200 kg	2 400 kg	2 490 kg	2 690 kg
Total weight	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg

Basic technical data	D1-64 KV 11.x	D1-64 KV 14.x	D1-64 KV 18.x	D1-64 KV 21.x	D1-64 KV 25.x	D1-64 KV 28.x	D1-64 KV 32.x
Length A1 (A2)	6 400 (6 000)	6 400 (6 000)	6 400 (6 000)	6 400 (6 000)	6 400 (6 000)	6 400 (6 000)	6 400 (6 000)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	1 050 (800)	1 250 (1 000)	1 500 (1 250)	1 750 (1 500)	2 000 (1 750)	2 250 (2 000)	2 500 (2 250)
Volume	11,23 m ³	14,04 m ³	17,55 m ³	21,06 m ³	24,57 m ³	28,08 m ³	31,59 m ³
Distance locking pin L4	3 640 mm	3 640 mm	3 640 mm	3 640 mm	3 640 mm	3 640 mm	3 640 mm
Weight of container ±5%	1 950 kg	2 120 kg	2 180 kg	2 290 kg	2 470 kg	2 620 kg	2 860 kg
Total weight	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg

Basic technical data	D1-69 KV 12.x	D1-69 KV 15.x	D1-69 KV 19.x	D1-69 KV 23.x	D1-69 KV 27.x	D1-69 KV 30.x	D1-69 KV 34.x
Length A1 (A2)	6 900 (6 500)	6 900 (6 500)	6 900 (6 500)	6 900 (6 500)	6 900 (6 500)	6 900 (6 500)	6 900 (6 500)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	1 050 (800)	1 250 (1 000)	1 500 (1 250)	1 750 (1 500)	2 000 (1 750)	2 250 (2 000)	2 500 (2 250)
Volume	12,17 m ³	15,21 m ³	19,01 m ³	22,81 m ³	26,62 m ³	30,42 m ³	34,22 m ³
Distance locking pin L4	3 890 mm	3 890 mm	3 890 mm	3 890 mm	3 890 mm	3 890 mm	3 890 mm
Weight of container ±5%	2 140 kg	2 240 kg	2 300 kg	2 440 kg	2 590 kg	2 790 kg	3 040 kg
Total weight	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg	20 000 kg

Basic technical data	D1-74 KV 15.x	D1-74 KV 19.x	D1-74 KV 23.x
Length A1 (A2)	7 400 (7 000)	7 400 (7 000)	7 400 (7 000)
Width B1 (B2)	2 550 (2 340)	2 550 (2 340)	2 550 (2 340)
Height C1 (C2)	2 000 (1 750)	2 250 (2 000)	2 400 (2 150)
Volume	28,66 m ³	32,76 m ³	35,22 m ³
Distance locking pin L4	4 140 mm	4 140 mm	4 140 mm
Weight of container ±5%	3 100 kg	3 200 kg	3 300 kg
Total weight	20 000 kg	20 000 kg	20 000 kg

Hook lift type: **Z**

The manufacturer reserves the right for technical modifications.