


Type: IT1-24 KV x. x /150  
 width  
 rear panel  
 volume

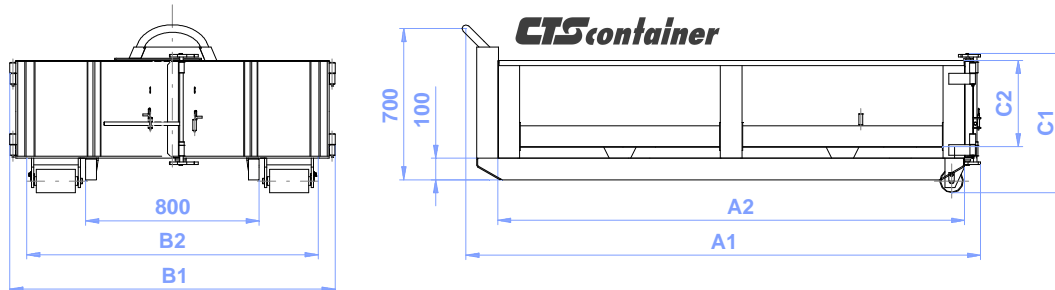

Designed for handling and transport of soil, waste, constructional and loose material on truck or trailer mounted hook lifts.

It is manufactured of square sheet steels of 3 mm thickness (floor) and 2 mm (sides) in various volumes.

Robust container beams are made of "I 100" profile.

Rear panel designation as follows (the last digit in container type):

- **x1** dump tailgate, flap, opened around the upper horizontal hinges, or
- **x2** twin rear door, opened around the vertical hinges to sides, with lock in the open position.

**Accessories and adjustments for extra charge:** (has to be placed in order)

- cover or tarpaulin for container
- hooks for fastening the net or tarpaulin
- the colour design of surface treatment can be adopted to customer's requirement
- other, as per agreement

Basic technical data	IT1-24 KV 1.x/150	IT1-24 KV 3.x/150
Length A1 (A2)	2 380 (2 160) mm	
Width B1 (B2)	1 500 (1 344) mm	1 500 (1 344) mm
Height C1 (C2)	645 (400) mm	1 245 (1 000) mm
Volume	1,15 m <sup>3</sup>	2,89 m <sup>3</sup>
Weight of container	330 kg	390 kg
Total weight	2 000 kg	2 000 kg

**Hook lift type: Z**

*The manufacturer reserves the right for technical modifications.*